

DeltaSolo – Fully Automatic Pressure Booster System



DeltaSolo SVP



Applications:

- Irrigation systems and rainwater harvesting system
- Service water supply systems for trade and industry

More information:

www.ksb.com/products



DeltaSolo MVP

DeltaSolo – Fully Automatic Pressure Booster System

- Energy-efficient**
 - KSB SuPremE® IE5* synchronous reluctance motors (only for variant DeltaSolo SVP)
 - Energy-efficient operation and constant pressure ensured by speed control

- Suitable for drinking water**
System and components certified to the corresponding national drinking water standards

- Handling**
Easy and fast commissioning of ready-to-connect, pre-assembled and tested system

- Long service life**
Corrosion resistance provided by powder-coated base-plate and stainless steel hydraulic components



- Reliable and safe**
 - Integrated dry running protection for reliable operation
 - Zero dead volume in piping and optimum flushing of add-on parts provide protection against legionella.

Technische Daten	MVP	SVP
Q [m³/h]	Up to 22	Up to 76
H [m]	Up to 108	Up to 145
P [bar]	Up to 16	Up to 16
T [°C]	Up to 60	Up to 60
Max. motor rating [kW]	Up to 2.2	Up to 22.0

*Efficiency classes to IEC TS 60034-30-2:2016

Pump characteristic curves

For a better overview only some pressure classes are shown; further pressure classes are available as standard.

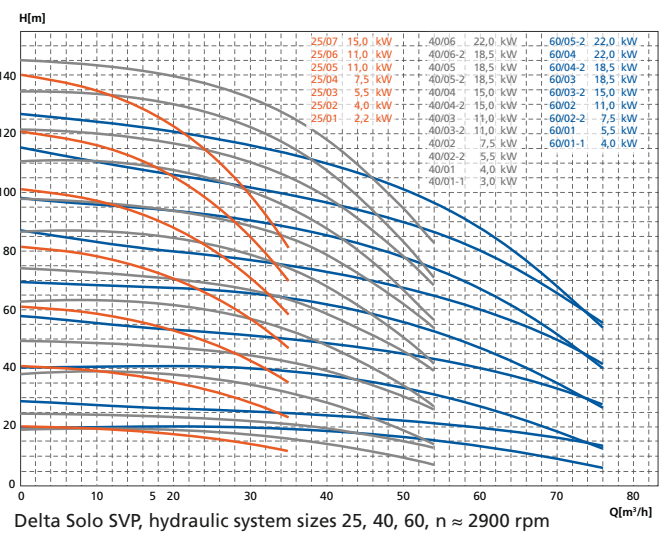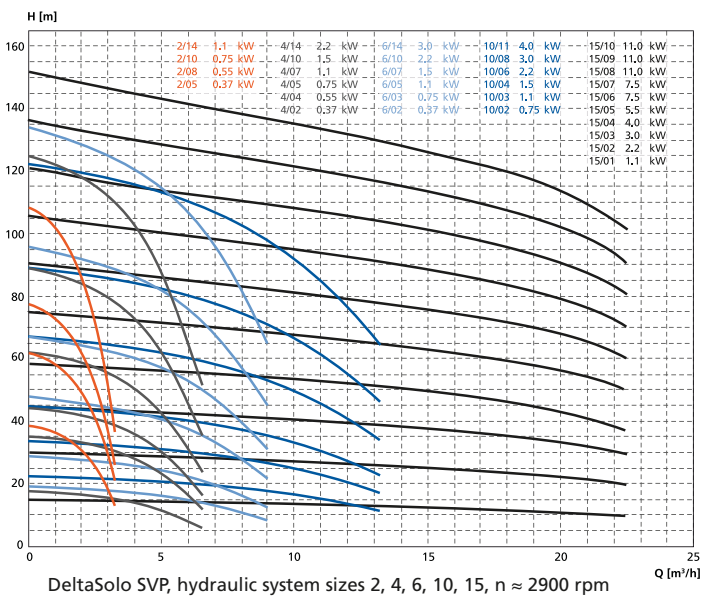

KSB SE & Co. KGaA
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com